


FALCON (RGS mini)



THE GENESIS AIR FALCON IS A STANDALONE AIR PURIFIER THAT USES ADVANCED PHOTOCATALYTIC OXIDATION (PCO) TECHNOLOGY TO ELIMINATE VOCs AND VIABLE AIRBORNE MICROORGANISMS.

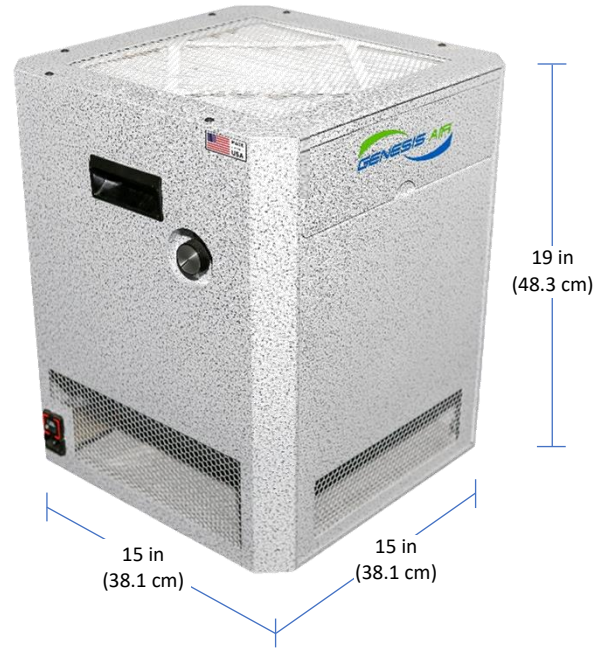

SIMPLE

Clearly defined cleaning process, easily understood design process, versatile installation, and easy to maintain.

SAFE

Third-party validation of performance on VOCs and bioaerosols, passive technology with no byproducts that could be more harmful than contaminants removed, 20+ years of success.

SUSTAINABLE

0.05" (12 Pa) of air pressure drop at 500 FPM (2.54 m/s) face velocity, low process energy consumption, sustained performance with 15-year panel life

SOLUTIONS

Valued product that meets demands of good indoor air quality and low carbon footprint.

TYPICAL APPLICATIONS

Control of MOLECULAR CONTAMINANTS including odors and VOCs found in buildings such as airports, casinos, schools, restaurants, and indoor agriculture. 4S Centerpoint is also very effective cleaning environmental tobacco smoke and wildfire smoke odors.

Inactivation of MICROORGANISMS including viruses, bacteria, mold, and fungi that challenge hospitals, schools, offices, government buildings, and prisons.

HEALTHY BUILDINGS and ENERGY REDUCTION are both possible when indoor air quality is maintained using ASHRAE Standard 62.1 Indoor Air Quality Procedure (IAQp) that allows for cleaning indoor contaminants and recirculating conditioned air instead of dilution of the contaminants with outdoor air.

FEATURES

| | |
|---------------------|-----------------------------|
| Casing..... | 20 gauge |
| Paint..... | Powder Coated |
| Filter..... | 2" 12x12 MERV 13 |
| UV Lamp Life..... | 12,000 hours |
| Min UV Output..... | 775 μ W/cm ² |
| Fan Speed..... | Adjustable |
| Power cord..... | NEMA 5-15P, 10ft |
| Parts Warranty..... | 12 months |
| Certifications..... | UL 2998 |
| | FDA 510K, Class II Medical |

OPTIONAL ACCESSORIES

- Gray cabinet finish
- White cabinet finish
- Black cabinet finish
- Casters
- Wall Bracket
- 6" 12x12 HEPA filter

NOTE: 1.) UV output is based on end-of-life coverage of entire catalyst at 12,000 hours.
2.) CLASS II Medical device has been tested to achieve 99.99% reduction of viable Escherichia Coli, Staphylococcus Epidermidis, and MS2 (bacteriophage).

PERFORMANCE DATA

| MODEL | AIRFLOW RANGE cfm (cmh) | COVERAGE AREA sq ft (m ²) | CATALYST | UV LAMP QTY | UV LAMP in (cm) | VOLTAGE | AMPS | WEIGHT lb (kg) |
|----------|----------------------------|--|----------|-------------|-----------------|----------|------|-------------------|
| RGS Mini | 300 - 500 (510 - 850) | 1,111 (103) | 1212 PCP | 2 | 12 (30.5) | 120/1/60 | 3.02 | 40 (18.1) |